

40x40x10 mm

SUNON




4.9~8.6 CFM



KDE Series (Magnetic Levitation System Motor)

Model	P/N	Bearing ● VAPO ○ BALL ⊙ 2BALL	Rating Voltage (VDC)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
KDE1204PFVX	MS	●	12	0.10	1.2	8800	8.6	0.23	36	16
KDE1204PFV1	MS	●	12	0.08	1.0	7400	7.3	0.18	30	16
KDE1204PFV2	MS	●	12	0.05	0.6	5500	4.9	0.12	25	16
KDE1204PFBX	MS	○	12	0.10	1.2	8800	8.6	0.23	37	16
KDE1204PFB1	MS	○	12	0.08	1.0	7400	7.3	0.18	31	16
KDE1204PFB2	MS	○	12	0.05	0.6	5500	4.9	0.12	26	16

*Remarks : GM series are available with lower power consumption, higher torque and higher T^o range (ïÜ70℃J).

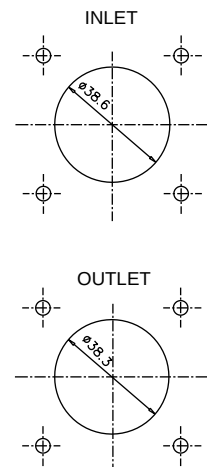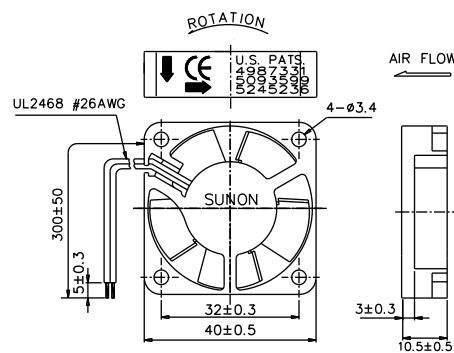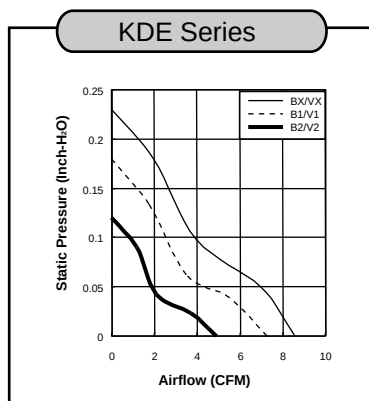

*Specifications subject to change without notice.